

Data Sheet

GREENFLOW 75

High performance, low profile resin distribution medium

DESCRIPTION


Greenflow 75 is designed to efficiently distribute resin with little waste due to the low profile, tight construction. Greenflow 75 can be used with polyester, vinylester and epoxy resins.

TECHNICAL DATA

Material type	Polypropylene
Colour	Green
Configuration of net	Extruded
Maximum use temperature	150°C (302°F)
Mesh weight	98 g/m ²
Shelf life	Unlimited when stored in original packaging at 22°C (72°F)

SIZES

Thickness	Width	Length
0.9 mm (0.03 in)	1.04 m (41 in)	106.7 m (350 ft)
0.9 mm (0.03 in)	1.5 m (60 in)	106.7 m (350 ft)

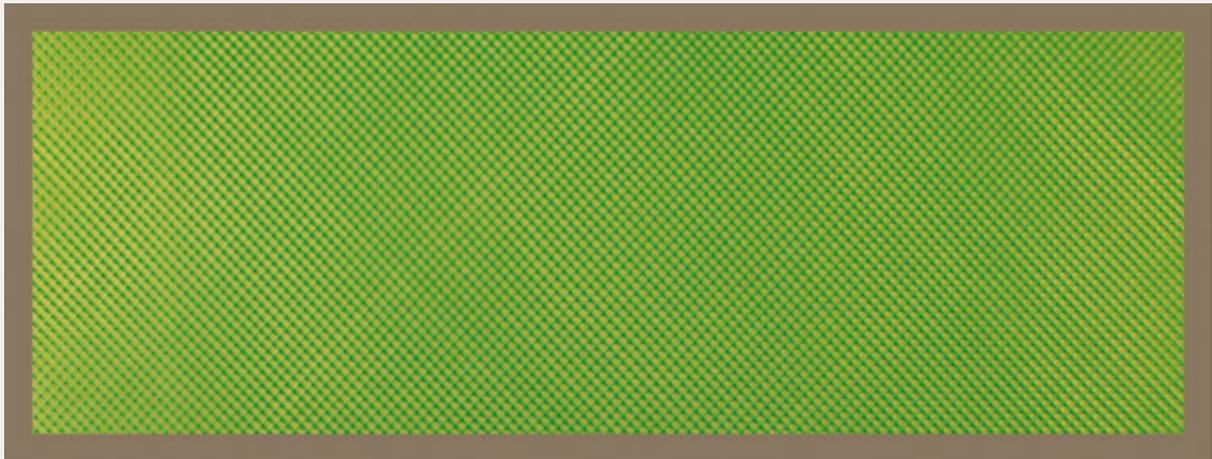

SUSTAINABILITY



NOTES

- This product is an extruded mesh and does not fray when cut.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.