

Part No.

V79040

BUSCH R5 RA 0040 F · Oil-Lubricated Rotary Vane Vacuum Pump



DESCRIPTION


The V79040 is the highest-capacity oil-lubricated rotary vane vacuum pump in ATL Composites' range, supplied as part of the BUSCH® R5 range. Designed and manufactured in Germany by Busch Vacuum Solutions, it delivers a nominal pumping speed of 40 m³/hr at 50 Hz down to an ultimate pressure of 0.1 hPa — combining high flow for fast bag pull-down with the deep, stable vacuum required for resin infusion of large hull and deck panels, multi-line infusions and production laminating. The pump circulates 1.0 litre of vacuum pump oil to seal, cool and lubricate the pumping chamber — so unlike ATL's dry vane range it requires periodic oil and filter changes, and an inlet filter and catch pot should always be fitted to keep resin and solvent carry-over out of the pump. ATL supplies the V79040 ready for workshop connection — pre-wired for 240 V single-phase operation and fitted as standard with a liquid-filled vacuum gauge, air bleed ball valve, cassette filter and 3-pin plug and lead.

BENEFITS

- Ultimate pressure to 0.1 hPa — deep, stable vacuum for resin infusion and degassing
- High pumping speed at low pressure, designed for continuous operation across long infusion and cure cycles
- Highly durable fibre-reinforced epoxy resin vanes and proven rotary vane technology for a long service life
- Gas-ballast valve option handles moisture and volatiles drawn off during infusion and degassing
- Supplied ready to run: 240 V single phase with gauge, air bleed valve, cassette filter and 3-pin plug
- Specified, supplied and supported by ATL Composites, exclusive BUSCH® distributor to the marine and composites industry



BUSCH R5 RA series oil-lubricated rotary vane vacuum pump (RA 0025 F shown)

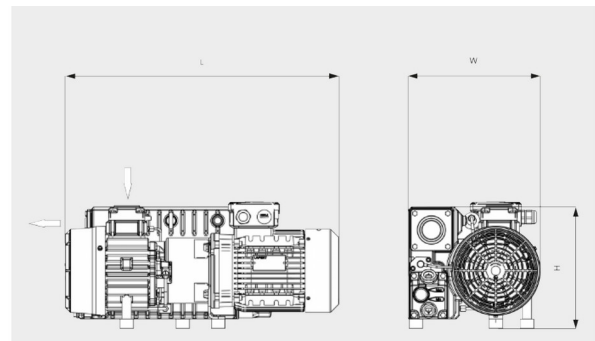

Dimensional drawing — L 644 x W 283 x H 278 mm

TECHNICAL DATA

PUMP TYPE	Oil-lubricated rotary vane vacuum pump
BUSCH MODEL	R5 RA 0040 F
NOMINAL PUMPING SPEED	40 / 48 m ³ /h (50 / 60 Hz)
ULTIMATE PRESSURE (GAS-BALLAST VALVE CLOSED)	0.1 ... 0.5 hPa (mbar) (50 / 60 Hz)
ULTIMATE PRESSURE (GAS-BALLAST VALVE OPEN)	0.5 ... 1.5 hPa (mbar) (50 / 60 Hz)
NOMINAL MOTOR RATING	1.4 / 1.7 kW (50 / 60 Hz)
NOMINAL MOTOR SPEED	1500 / 1800 min ⁻¹ (50 / 60 Hz)

TECHNICAL DATA

POWER CONSUMPTION AT 100 MBAR	1.1 / 1.2 kW (50 / 60 Hz)
POWER CONSUMPTION AT ULTIMATE PRESSURE	0.6 / 0.7 kW (50 / 60 Hz)
SOUND PRESSURE LEVEL (ISO 2151)	63 / 66 dB(A) (50 / 60 Hz), K _{pA} = 3 dB
OIL CAPACITY	1.0 litre
WEIGHT (APPROX.)	45 kg
DIMENSIONS (L X W X H)	644 x 283 x 278 mm
GAS INLET / OUTLET	G 1¼" / G 1¼"
VANE MATERIAL	Fibre-reinforced epoxy resin
POWER SUPPLY	240 V single phase — supplied with 3-pin plug and lead
LUBRICATION	Oil-flooded — requires periodic oil and filter changes
SUPPLIED AS STANDARD	Liquid-filled vacuum gauge; air bleed ball valve and filter; cassette-type filter; 3-pin plug and lead
OPTIONS / ACCESSORIES	Gas-ballast valve; various inlet filters; filter pressure gauge; oil level switch; vacuum regulating unit; Busch vacuum pump oils
MATERIALS TO AVOID	Uncured resin/styrene carry-over, solvent vapours, water and abrasive dust — always fit an inlet filter and catch pot
STORAGE	Store dry and dust-free, indoors, between 0 °C and 40 °C

ATL PART NO.	BUSCH MODEL	NOMINAL PUMPING SPEED (50 / 60 Hz)	ULTIMATE PRESSURE	NOMINAL MOTOR RATING
V79004	R5 PB 0004 C	4.0 / 4.8 m ³ /h	2.0 hPa (mbar)	0.10 / 0.12 kW
V79020	R5 PB 0008 C	8.0 / 9.6 m ³ /h	2.0 hPa (mbar)	0.35 / 0.45 kW
V79025	R5 RA 0025 F	25 / 30 m ³ /h	0.1 ... 0.5 hPa (mbar)	1.0 / 1.2 kW
V79040	R5 RA 0040 F	40 / 48 m ³ /h	0.1 ... 0.5 hPa (mbar)	1.4 / 1.7 kW

Oil-lubricated and dry vane pumps are not interchangeable. ATL's dry vane range (V78008–V78040) pulls to 120–150 hPa and needs no operating fluid — the right choice for vacuum bagging, bonding and veneering. The oil-lubricated R5 range above pulls to 2.0 hPa (PB) or 0.1 hPa (RA) and requires oil maintenance — the right choice where resin infusion or degassing demands a deeper, more stable vacuum. Contact ATL to confirm the correct pump for your mould size, process and cycle time.

DISCLAIMER

The information in this Technical Data Sheet is provided in good faith as general guidance only. Values stated are typical properties and should not be interpreted as guaranteed performance, specification limits, or design data. Product performance may vary depending on manufacturing processes, application methods, service conditions, storage, handling, and other factors beyond the control of ATL Composites Pty Ltd.

ATL products are intended for sale to industrial and commercial customers. Users are responsible for determining product suitability for their intended application and should conduct their own testing prior to use. ATL Composites Pty Ltd makes no express or implied warranties, including merchantability or fitness for purpose. ATL Composites Pty Ltd shall not be liable for any indirect, special, consequential, or economic loss.